

SÉURA VANITY MIRRORS

SMART Mirrors

Connect to your digital world. Séura SMART Mirrors transform the bathroom into a personalized digital hub, enabling you to be more connected and more efficient during your morning routine.

IDEAL SPACES

Bathroom Vanity
Dressing Room

DISPLAY SIZE

27 inch

MIRROR GLASS

Vanishing
Vanity Glass

CUSTOM OPTIONS

Mirror Size
Display Location within Mirror
Custom Frame



PERSONALIZED CONTENT

Start each day with the information that matters most to you. Create your own personalized home screen with curated information by choosing from a menu of more than a million widgets and apps.



VOICE AND TOUCH


Multi-task like never before with hands-free voice-to-text and intuitive touch control options to connect to your calendar, email, weather, and favorite apps.



SMART CONTROL

Transform the bathroom into a smart home control hub. View your security cameras, dim the lights, open the garage and more, all from the convenience of your bathroom mirror.

DISPLAY CONNECTIONS

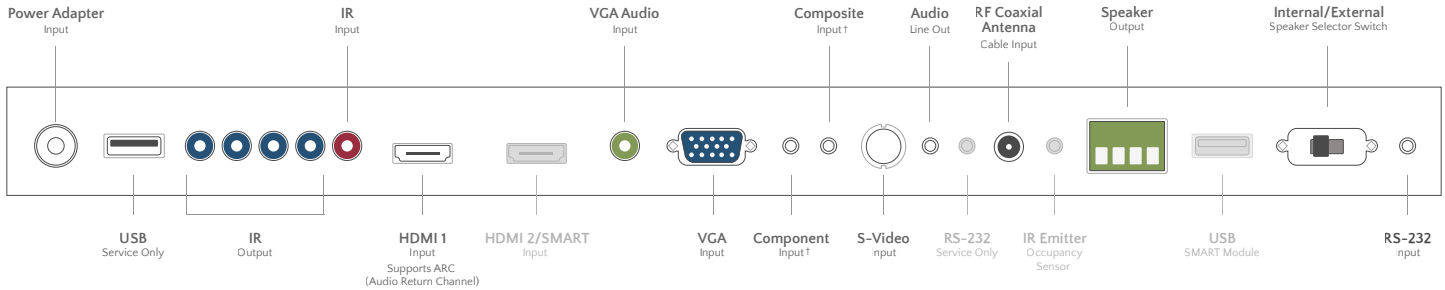

27 INCH DISPLAY
Model: 27-V2-SMT, Version: 5A


| | | |
|----------------|-----------------------------|---|
| CUSTOMIZATIONS | CUSTOM DESIGN OPTIONS | Custom frame, display placement, matching mirrors |
| | MAXIMUM MIRROR SIZE | Up to 94" w x 70" h or 70" w x 94" h |
| | MINIMUM MIRROR SIZE | 28" w x 32" h (Recessed) 29" w x 36" h (Surface) |
| | STANDARD MIRROR SIZES | 30" w x 42" h 42" w x 42" h 60" w x 42" h |
| VIDEO | VIEWABLE SCREEN SIZE | 23 3/4" w x 13 1/2" h |
| | DISPLAY RESOLUTION | 1920 x 1080 |
| | ASPECT RATIO | 16:9 |
| | CONTRAST RATIO | Typical 1200:1 |
| | TUNER | ATSC, NTSC, QAM |
| | RESPONSE TIME | 3.5 ms |
| | VIEWING ANGLE | 170° Horizontal, 160° Vertical |
| INTEGRATION | HDMI | 1 |
| | COMPONENT YPBPR | 1† |
| | COMPOSITE (AV) | 1† |
| | VGA | 1 |
| | S-VIDEO | 1 |
| | RF COAXIAL ANTENNA | 1 |
| | USB | 1 |
| | IR INPUT | 1 |
| | IR OUTPUT | 4 |
| AUDIO | PC AUDIO IN | 1 |
| | FIXED LINE OUT | 2 |
| | PHOENIX TYPE SPEAKER OUTPUT | 2 x 5W @8Ω/ channel |
| | INTERNAL SPEAKERS | 2 x 10W |
| SMART MODULE | STORAGE | 128GB Internal Storage MicroSD (TF) Card Slot |
| | RAM | 4GB |
| | HARDWARE PLATFORM | Android |
| | OPERATING SYSTEM/VERSION | Android 7.1 "Nougat" |
| | CPU | 2.0GHz Six-Core ARM 64-bit processor |
| | POWER SOURCE | 2A @ 110V power consumption |
| | ETHERNET | 1000 Mbps Ethernet |
| | WI-FI/WIRELESS TYPE | 2.4GHz/5GHz 802.11a/b/g/n/ac |
| | BLUETOOTH | Bluetooth 4.1 (Support BLE) |
| | PRE-LOADED WIDGETS | Mail, Calendar, Weather, Time |

27 INCH DISPLAY
Model: 27-V2-SMT, Version: 5A

| | | |
|---------------|----------------------------------|--|
| MOTION SENSOR | TYPE | X-Band Frequency Occupancy Sensor |
| | RANGE | 12 Feet |
| | DEFAULT SLEEP TIME | 5 Minutes |
| INSTALLATION | MOUNT OPTIONS | Integrated Surface Mount or Integrated Recessed Mount |
| | SURFACE MOUNT OFF-WALL DISTANCE | 1.5" |
| | RECESSED MOUNT IN-WALL DEPTH | .75" |
| | RECESSED MOUNT WALL OPENING SIZE | 28" w x 32" h |
| OTHER | CERTIFICATIONS AND COMPLIANCE | FCC |
| | WARRANTY | Séura warrants SMART Mirrors with respect to Séura's labor, glass, structure, and assembly for three (3) years; display including remote, power supply and SMART Technology for one (1) year. |
| | REMOTE | Séura IR Remote Control |

MIRROR BACK SCHEMATIC

On-mirror configuration shown. Exact location varies by mirror size.

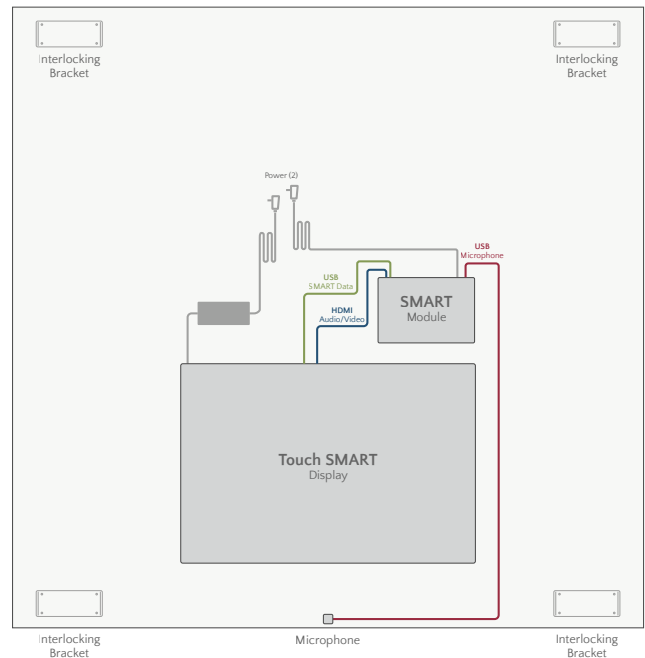

† Mini jack connection on TV, product includes adapter cables
Additional cost for customizations.